

IMPORTANT – LEAVE THE INSTRUCTIONS WITH THIS UNIT



ACRYLIC BATHTUBS WITH INTEGRAL APRONS INSTALLATION INSTRUCTIONS


- **WARNING: The use of alcohol, drugs, or medication can greatly increase the risk of hyperthermia.** Prolonged immersion in hot water may induce hyperthermia. Hyperthermia occurs when the internal temperature of the body reaches a level several degrees above the normal body temperature of 98.6F (37C). The symptoms of hyperthermia include an increase in the internal temperature of the body, dizziness, lethargy, drowsiness, and fainting. The effects of hyperthermia include: (a) failure to perceive heat, (b) failure to recognize the need to exit the bath, (c) unawareness of impending hazard, (d) fetal damage in pregnant women, (e) physical inability to exit the bath, and (f) unconsciousness resulting in the danger of drowning.

TUBS WITH EXTENDED FLANGES

- Prepare the framing pocket to suit the appropriate length of tub, 1/8" longer than the tub.
- Check the location of the drain cut-out in the floor, and cut if not done previously.
- Measure from the bottom of the apron to the top of the flange at the front of the tub. Scribe a line at this height on the studs or drywall at both ends and along the back wall of the framing pocket. This line will assist in levelling the tub.
- Attach the waste and overflow fitting, and carefully slide tub into position. Check for level at both ends and along the back wall, adjusting as necessary by shimming under the wooden support strip under the tub, or adjusting screw-in feet if that option is ordered.
- Once satisfied with location, mark and drill clearance holes in the nailing flange for mounting screws, lining up with the centre of all wall studs. (Fig 1 & 2) *NOTE: Failure to drill clearance holes may result in stress cracks in the acrylic finish.*
- Attach the unit with screws at each stud, making sure that the screws are long enough to penetrate into the studs if installing over previously installed drywall.

PRODUCT DIMENSIONS Measurement tolerances $\pm 1/4"$ (6.3mm)

MODEL	LENGTH	DEPTH	HEIGHT	C	D
AC3060	59 3/4" / 1518mm	30" / 762mm	22 1/2" / 572mm	9 1/4" / 235mm	14 1/4" / 362mm
AC3077	60" / 1524mm	30" / 762mm	24" / 610mm	10 3/8" / 264mm	13 7/8" / 352mm
AC3260	60" / 1524mm	32" / 813mm	22 1/2" / 572mm	9 3/16" / 233mm	15 1/2" / 394mm
AC3266	66" / 1676mm	32" / 813mm	22 1/2" / 572mm	9 3/16" / 233mm	15 1/2" / 394mm
AC3272	72" / 1829mm	32" / 813mm	22 1/2" / 572mm	9 3/16" / 233mm	15 1/2" / 394mm
AC3495	59 3/4" / 1518mm	34" / 862mm	22 3/4" / 578mm	8 3/8" / 213mm	17" / 432mm
AC3616	66" / 1676mm	36" / 914mm	23" / 584mm	8 1/4" / 210mm	18" / 457mm
AC3621	60" / 1524mm	32" / 813mm	24" / 610mm	10 3/8" / 264mm	15 7/8" / 403mm
AC3637	60" / 1524mm	32" / 813mm	22 3/8" / 568mm	8 3/4" / 223mm	16" / 406mm
AC3660	59 3/4" / 1518mm	35 7/8" / 911mm	23" / 584mm	9 3/8" / 238mm	20 1/2" / 521mm
AC3745	60" / 1524mm	30" / 762mm	22 3/8" / 568mm	8 3/4" / 223mm	14" / 356mm
AC3747	66" / 1676mm	32" / 813mm	23 1/4" / 591mm	9 3/4" / 248mm	16" / 406mm
AC3762	66" / 1676mm	30" / 762mm	23 1/4" / 591mm	9 3/4" / 248mm	14" / 356mm
AC3763	72" / 1829mm	30" / 762mm	23 1/4" / 591mm	9 3/4" / 248mm	14" / 356mm
AC3764	66" / 1676mm	30" / 762mm	23 1/4" / 591mm	9 3/4" / 248mm	14" / 356mm
AC3765	66" / 1676mm	32" / 813mm	23 1/4" / 591mm	9 3/4" / 248mm	16" / 406mm
AC3766	72" / 1829mm	30" / 762mm	23 1/4" / 591mm	9 3/4" / 248mm	14" / 356mm
AC3767	72" / 1829mm	32" / 813mm	23 1/4" / 591mm	9 3/4" / 248mm	16" / 406mm
AC3768	72" / 1829mm	32" / 813mm	23 1/4" / 591mm	9 3/4" / 248mm	16" / 406mm


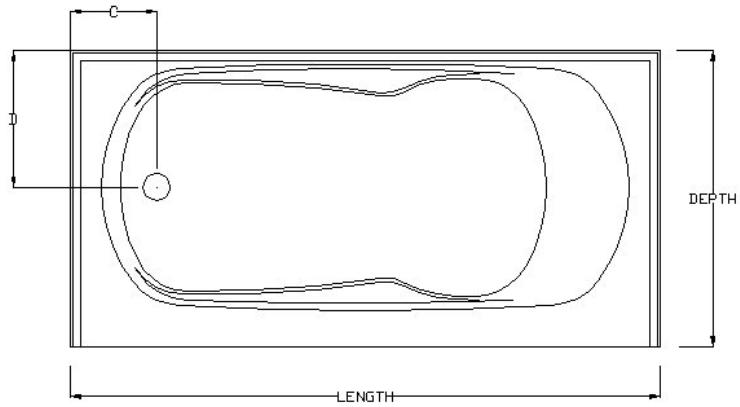


DRYWALLING

After the tub is installed, proceed with installation of drywall.

Our recommended drywall system, if tile is being used as the finish surface, is to butt the bottom of the drywall up to the top of the sealing flange. The tile can then project over the edge of the drywall, down to the horizontal ledge, 1" above the surface of the tub. (See Figure 1)

Alternatively, if the drywall is to be painted as the finish surface, the drywall can be butted to the nailing flange, or overlap the nailing flange, and be brought down to ¼" above the tile ledge. In either case, a bead of sealant such as silicone should be run along the bottom edge and gap filler. (See Figure 2)

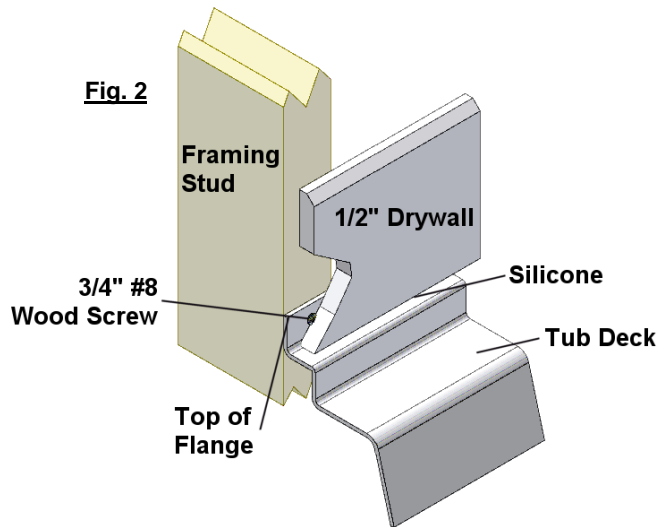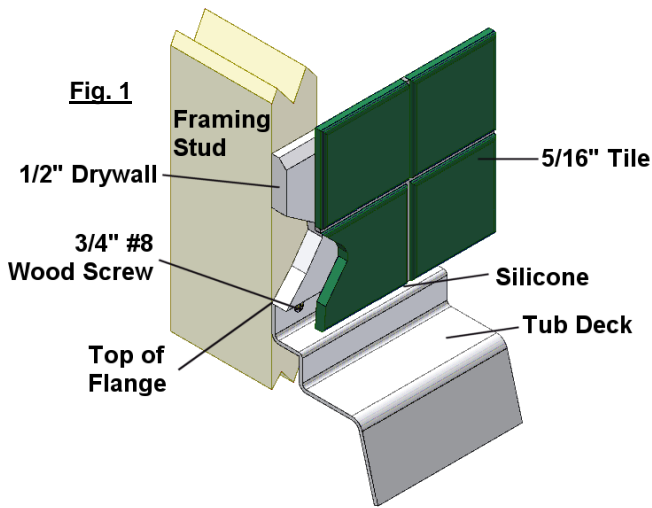

REMOVABLE ACCESS-PANEL MODELS (AL/AR)

On aprons with removable access panels for entry to the pump and wiring from the front of the unit, the access panel can be removed by inserting the blade of a flat screwdriver, or a dull kitchen knife, under any corner of the panel. (Take care not to scratch the exposed acrylic surfaces.) Gently pry the panel off, working around the perimeter until you can pull it out with your fingers. The panel is replaced by pushing it back into place by hand.

WHIRLPOOL \ BUBBLEAIR™ INSTALLATION INSTRUCTIONS

WARNING! When using electrical products, basic precautions should always be followed, including the following:

DANGER: RISK OF ELECTRICAL SHOCK. Grounding is required. An equipment grounding terminal is provided in the field wiring compartment. This terminal must be connected to the grounding means provided in the electric supply panel with a conductor equivalent in size to the circuit conductors supplying this equipment. The unit should be installed by a qualified service representative. The unit must be installed in compliance with all applicable National, State or Provincial Electrical Code requirements, through a ground-fault circuit-interrupter (GFCI) of the Class A type.

An independent branch circuit c/w CFGI is required for each of the following options:

BubbleAir Blower: 120V – 60Hz – 9.5A	Key pad controlled
Whirlpool Pump: 120V – 60Hz – 7.5A	Key pad or air button controlled
Heater: 120V – 60Hz – 12.5A	Flow switch controlled inside Heater

WARNING:

- Pumps must be installed on the factory-provided mountings to ensure correct height for priming and draining.
- Access to the pump and electrical components must be provided to allow for installation & maintenance – where the optional removable access panel apron is not used, alternative access must be provided. (*Recommended size 9 ½" x 18"*)
- **Do not lift tub by any of the plumbing or electrical components.** Handle carefully to avoid damage during installation.
- All units are factory tested for operation and leaks, but **must** be checked for leaks, etc. before being finally closed in, or tiled.
- Before filling the tub for the first time, remove all construction residue and foreign materials, and rinse with clean water, to avoid introducing contamination or grit into the piping and pump.
- Building materials and wiring should be routed away from the pump body or other heat-producing components.
- When installing in an island setting some whirlpool models may require you to tip the unit from side to side tucking the plumbing under the decking one side at a time.

CARE & MAINTENANCE

The following hints on care and maintenance are offered to assist you in keeping your tub or shower in “as new” condition.

Normal Care:

A quick sponge-down with warm water and a liquid detergent such as Mr. Clean, Fantastic, or Lysol Tub and Tile Cleaner will take care of most cleaning needs. In areas where the water is hard, more frequent cleaning will be necessary to avoid a build up on the surface. We recommend that a good quality car or boat wax be applied occasionally – this will preserve the gloss and will make cleaning easier.

Stains:

For stubborn stains, start with a liquid detergent; if this does not work, try a mild powder detergent such as Spic and Span, which also works well for removing heavy soap film. Cleaning pads made of nylon, saran or polyethylene and containing no abrasives may be used. **Do not use abrasive scouring powders or metal scouring pads – they can permanently damage the finish.** A mild abrasive action can be accomplished with an automobile type of rubbing compound – there are several types available, both coarse and fine. The fine ones take a little longer to remove a stain, but they do not dull the surface as much.

Dull Areas:

Should your stain removal result in a dull area, the shine can be restored with an automobile cleaner wax, such as Turtle Wax.

Paint Splashes:

A quick wipe with mineral spirits, turpentine or Polyclens and then a wash with water will remove paint. **Do not use paint remover or stripper, as these contain solvents which could permanently damage the surface.**

Things to Avoid:

Sand and grit. Dropped tools.

Damage:

Should your unit suffer accidental damage, it is quite possible that it can be repaired by a qualified repairperson. Consult your plumber, wholesaler or a Hytec Sales Agent.

WARNING! Any problems, or damage to jetting or electrical components should be performed by a qualified service representative.



LIMITED 5 YEAR WARRANTY

All acrylic and gelcoat products manufactured by Hytec are covered by a 5-year warranty from the date of sale to the original owner. This warranty does not cover materials and component parts manufactured by others (such as pumps, jets, pipes, and fittings), which are subject to warranties offered by their original manufacturers. Hytec Plumbing Products warrants to the purchaser of each Hytec product that such product will at time of sale be free from defect in material and workmanship, and that Hytec will at its option repair the original unit or supply an equivalent unit in exchange, such exchange to be F.O.B. at Hytec warehouse. Hytec shall not be responsible for shipping, handling, or installation damage; or any expense of removal, transportation or installation of any original or exchange unit. Under no circumstances will Hytec Plumbing Products assume liability for consequential damages or labour charges resulting therefrom.

This warranty is non-transferable and shall be voided if the unit is removed from its place of initial installation, or is not installed in accordance with the manufacturer's instructions. Further, this warranty does not apply if the unit has been subjected to accident, abuse, misuse, damage caused by flood, fire or act of God, or if the unit or the plumbing fixtures used in connection with it are not installed in compliance with local codes and ordinances. Any modifications or alterations to a unit, without prior authorization from Hytec Plumbing Products, or the installation of therapy jets by anyone other than Hytec Plumbing Products, will void all warranties.

HYTEC'S LIMITED WARRANTY OBLIGATIONS ARE EXPRESSLY LIMITED TO THOSE SET FORTH HEREIN, AND ARE IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED. THE LIABILITY OF HYTEC TO THE BUYER WITH RESPECT TO THE SALE OF A UNIT SHALL BE LIMITED TO REPAIR OR REPLACEMENT AS PROVIDED HEREIN TO A MAXIMUM OF THE PURCHASE PRICE OF THE RELEVANT UNIT AND DOES NOT INCLUDE ANY COST OF REMOVAL OR REINSTALLATION OR CONSEQUENTIAL DAMAGES OF ANY KIND.

To obtain warranty service, contact Hytec Customer Service at **(800) 871-8311** or **(250) 546-3067**, or email **hytec.customer.service@kohler.com**. Please have ready all pertinent information regarding your claim, including a complete description of the problem, the product, model number, serial number and a copy of your original invoice. If the serial number is not available, please provide a digital photo of the unit.

Authorized Service Representatives for Hytec have been thoroughly trained to perform both in and out of warranty repairs to Hytec products. Through this training, they are familiar with the Hytec Warranty Policy. If in the opinion of the Authorized Service Representative, the service required is not within the scope of the Hytec Warranty Policy, they will advise you before beginning the work. Should this occur, payment of all invoices related to the service is the responsibility of the consumer. If the problem can be attributed to incorrect installation please contact your installing contractor. Should there be a difference of opinion pertaining to warranty coverage between the Authorized Service Representative and the consumer; clarification will be provided by Hytec Customer Service.

HYTEC PLUMBING PRODUCTS
(Division of Kohler Canada Co.)
4150 Spallumcheen Drive
Armstrong, BC V0E 1B6
Phone (250) 546-3067 • Fax (250) 546-3170

Saskatoon	(306) 244-6622
Edmonton	(780) 451-2056
Calgary	(403) 730-7791
Vancouver	(604) 888-3114
Winnipeg	(204) 832-2354
Regina	(306) 525-1986